


Differential-Probe De-embedding Board

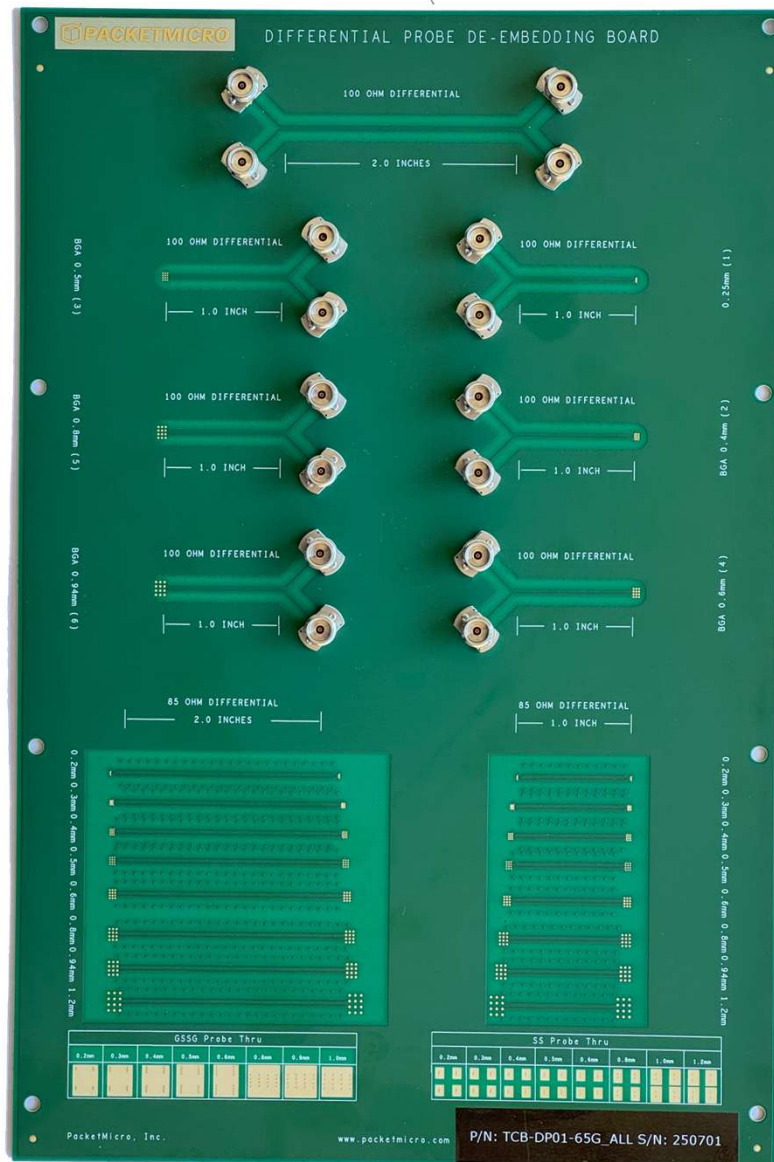

TCB-DP01-65G


- Frequency: 0 – 65 GHz
- Connectors: 1.85 mm
- Probe Pitches: 0.3mm (1), 0.4mm (2), 0.5mm (3), 0.6mm (4), 0.8mm (5), 0.94mm (6)
- P/N: TCB-DP01-65G_356 (0.5, 0.8, 0.94 mm, 3 pitches mounted)

TCB-DP01-40G


- Frequency: 0 – 40 GHz
- Connectors: 2.92 mm
- Probe Pitches: 0.3mm (1), 0.4mm (2), 0.5mm (3), 0.6mm (4), 0.8 mm (5), 0.94mm (6)
- P/N: TCB-DP01-40G_136 (0.3, 0.5, 0.94 mm, 3 pitches mounted)

Launch Footprints


0.3 mm (1)

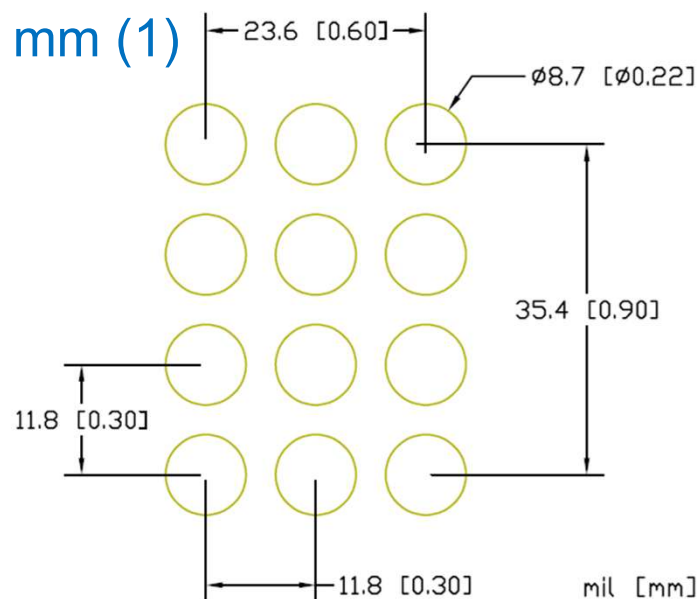

0.4 mm (2)

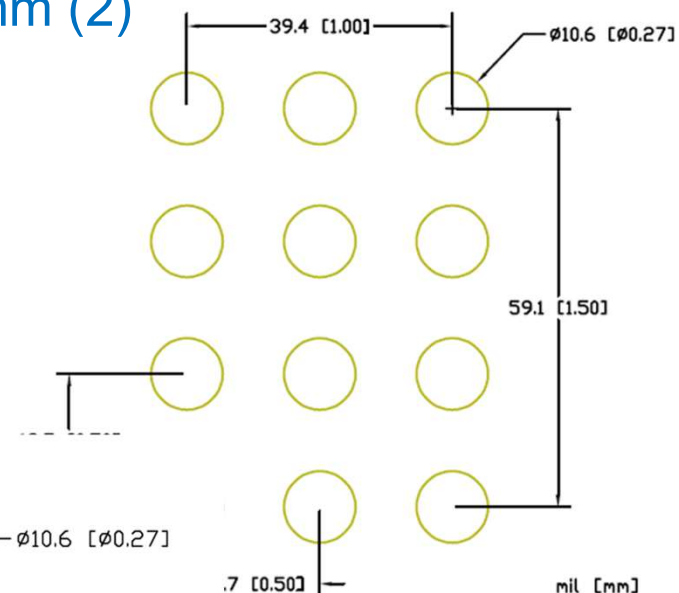


0.5 mm (3)

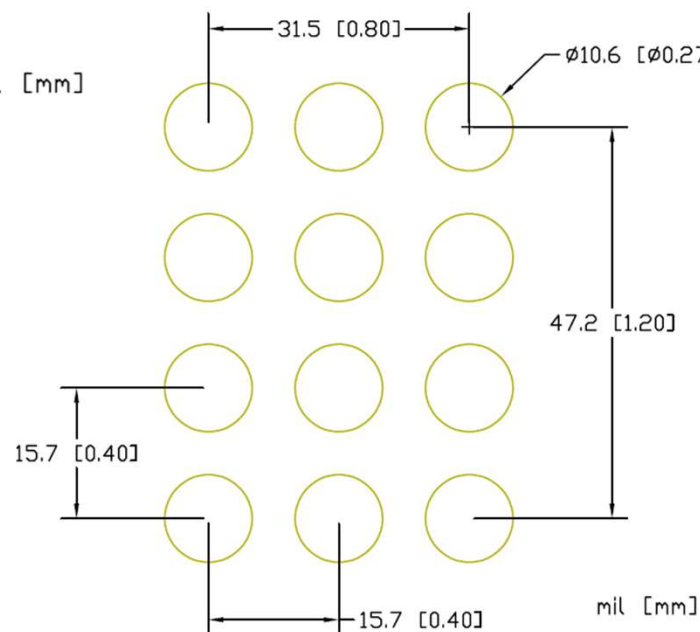


Launch Footprints – cont.

0.6 mm (4)

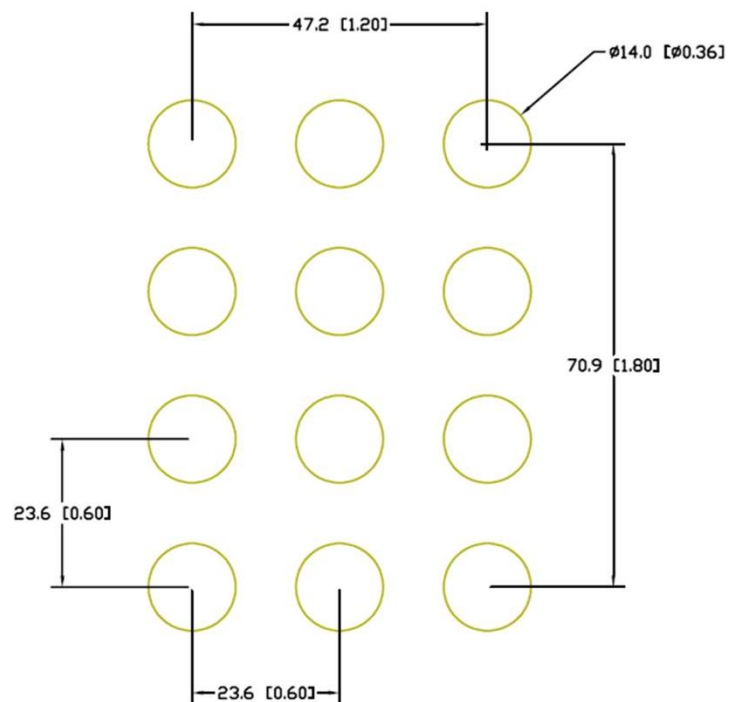

0.8 mm (6)

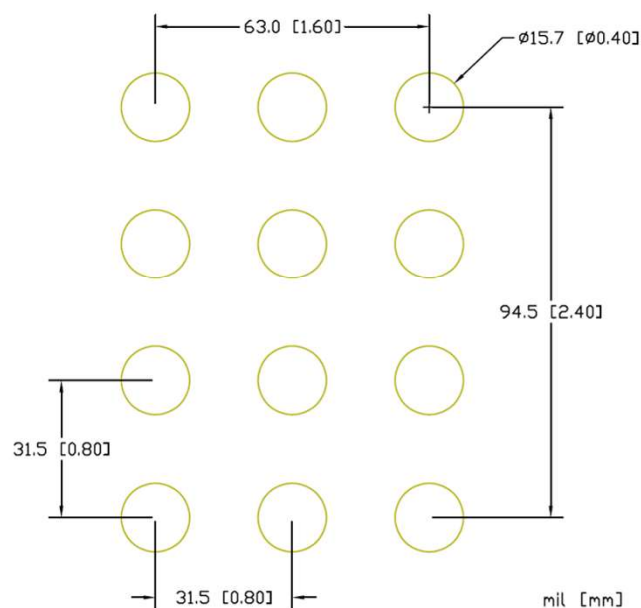

0.94 mm (5)

